





## QR5 BOLLARD

- Bridgelux 2835 LED
- Corrosion resistant aluminum exterior
- Housing color: **Black**
- IP65 and IK08 rated
- Intergrated DIP switch for 3 CCT & watt and photosensor
- 5 years warranty



Model No.	Type	Watt	CCT	Chips	Efficacy @3000K (-3%)	LM(±10%) @3000K	Input Volt.	PF	CRI	SPD	Working Temp	IP
VLBLB-R6-CT-MV10-BK	Flat+Cone	14W-19W-24W Selectable	30K-35K-40K Selectable	Bridgelux	140lm/w	3360lm 2660lm 1960lm	120-347	>0.90	> 85	4KV	-40°C~+45°C -40°F~+113°F	IP65

### 3 CCT & WATTAGE SELECTABLE

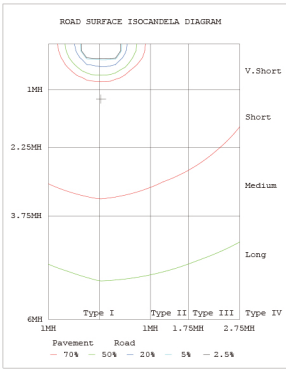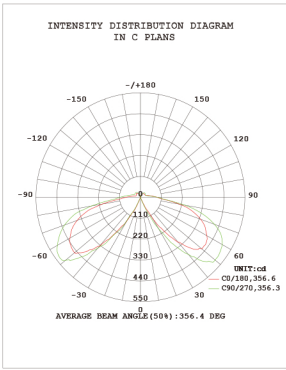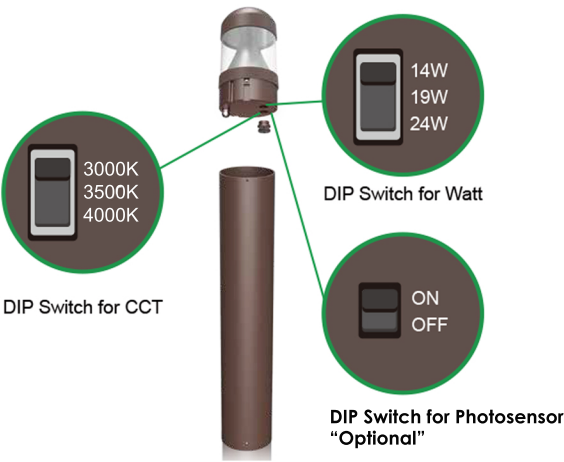

## Options (Minimum QTY Apply)

### PHOTOSENSOR OPTIONS




### 180 DEGREE SPILL SHIELD

This spill shield can be added to the bollard to provide a 180 degree of light coverage.



### THE TOP HEADS ARE INTERCHANGEABLE



### EM BACKUP OPTIONS

