





Features

- 5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
- Horizontal or vertical rectangle options
- Made of durable die-cast aluminum
- Outdoor rated, suitable for indoor and outdoor installation
- Easy to install: just install one screw (above the lamp) to save time
- No screws on the panel, concise and beautiful
- The lamp shone down, uniform light output and Anti-glare
- Fits into 2"x4" J-Box with minimum inside dimensions of 3"Lx2"Wx2"D
- Suitable for WET LOCATION
- Durable powder coated finish for use in coastal outdoor applications.

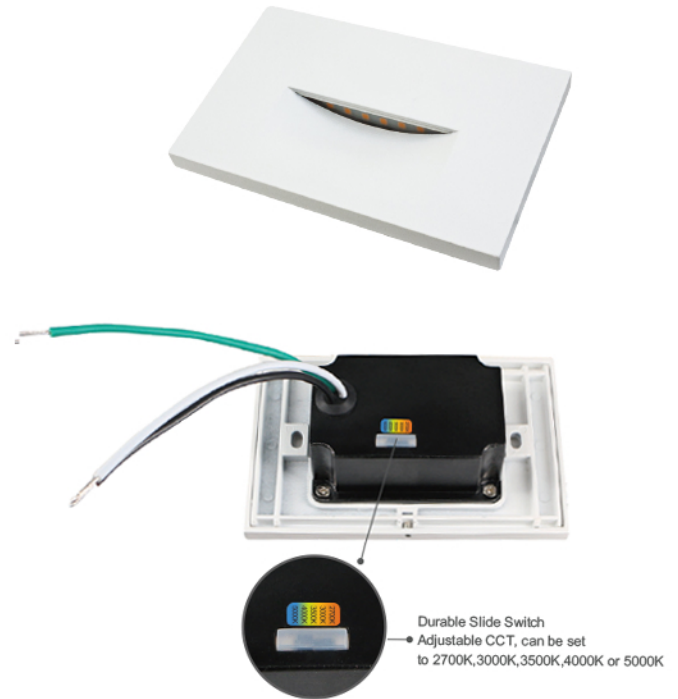

DIMENSION

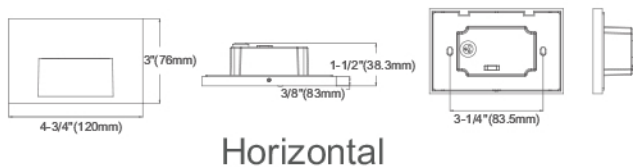

	SPECIFICATIONS	
Model	SLT1049-5CT-WH	SLT1049-5CT-BK
Watts	3W	3W
Light Output(lm)	85lm	85lm
Color Temperature(K)	Field selectable (2700K/3000K/3500K/4000K /5000K)	
CRI	90Ra+	
Default Driver Input	AC120V, 60Hz	
Dimming	Triac Dimming	
Power Factor	>0.9	
Approved Location	Wet Location	
Operating Temp.	(-4°F~104°F) -20~40°C	
Beam Angle	120°	

Type IC for direct contact with insulation

INSTALLATION

