


Features

- Horizontal
- Made of durable die-cast aluminum with frosted diffuser
- Low profile, flush to wall aesthetics with no visible hardware
- Input voltage 120VAC 60Hz, direct wiring, no driver needed
- Fits into 2" x 4" J-box with minimum inside dimensions of 3"Lx2"Wx2"D
- Suitable for WET LOCATION
- Durable powder coated finish for use in coastal outdoor applications.



DIMENSION

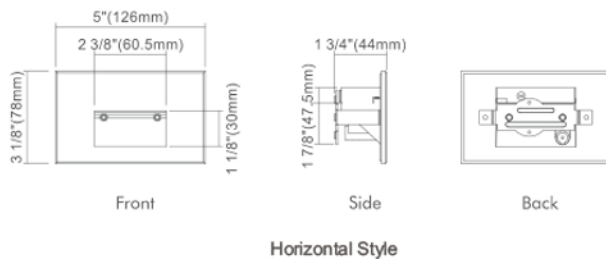

	SPECIFICATIONS	
Model	STL1046-3K-WH	STL1046-3K-BK
Watts	5W	5W
Light Output(lm)	85lm	85lm
CCT'S	3000K	
CRI	90Ra+	
Input Voltage	AC120V	
Dimming	Triac Dimming	
Power Factor	>0.9	
Approved Location	Wet Location	
Operating Temp.	(-4°F~104°F) -20~40°C	
Beam Angle	120°	

INSTALLATION

