


IMPORTANT: Read carefully before installation and retain for future reference.

- RISK OF ELECTRICAL SHOCK. TURN MAIN SWITCH AND CIRCUIT BREAKER TO “OFF” POSITION BEFORE SERVICE OR RELAMPING.
- All electrical connections must be in accordance with local codes, ordinances and National Electrical Code. If you are unfamiliar with proper electrical wiring or connections, secure the services of a qualified licensed electrician.
- Proper grounding of the fixture is essential for protection from shock, correct operation of the electronic driver and the elimination of electrical interference.

Flush Mount

FIG.1

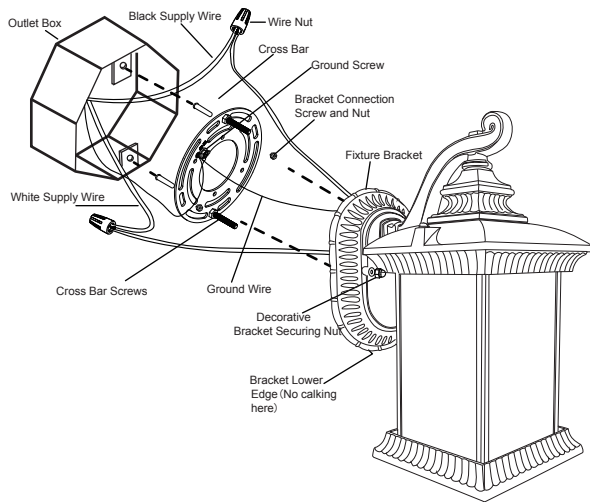

PREPARATION:

1. Tools and material needed: screw driver, pliers, wire nuts, electrical tape.
2. To help prevent the possibility of electrical shock, the use of rubber sole shoes is recommended.
3. Exercise care when handling the fixture to avoid cuts or abrasions.
4. If a ladder is needed, use sturdy ones and set them on flat level surface.

INSTALLATION FOR FLUSH MOUNTING: (Please refer to FIG.1)

TURN OFF POWER FROM THE MAIN CIRCUIT BEFORE INSTALLING FIXTURE.

Step 1 - Preparing for installation.

- A. **Disconnect electrical power** at fuse or circuit breaker box before installing or servicing any part of this fixture.
- B. Carefully remove the fixture from the carton.
- C. Install mounting plate on the outlet box (not provided) by securing it with two screws.

Step 2 - Wiring fixture.

- A. Make all wire connections to appropriate wire. Secure with wire nuts (provided).
- B. Connect the green wire from the fixture to the ground wire. Connect the black wire from the fixture to the black (L) wire from supply power source. Connect the white wire from the fixture to the white (N) wire from supply power source.
- C. Tuck all connections neatly into the outlet box.

Step 3 - Mounting.

Apply silicone caulk on the edge of the fixture bracket, except at the brackets lower edge. Place the bracket of the fixture on the bracket connecting screws protruding out of the two holes on the fixture bracket. Make sure the fixture is oriented right side up on the mounting surface. Confirm that the caulking sealant is completely around the edge of the fixture bracket where it meets the wall surface (There should be no caulking at the lower edge of the bracket). Use the bracket securing nuts with rubber washers to fasten the bracket to the wall. If the fixture bracket is not tight against the wall, you may need to adjust the two nuts that are on the bracket connecting screw. Make sure the unit is tight and secure against the wall.

Step 4 - Slide the CCT switch on the DOB of fixture to select from 3000K, 4000K, 5000K.

Step 5 - Turn power on.