

INSTALLATION INSTRUCTIONS

V I N C I
L I G H T I N G

120V 60Hz

SAFETY PRECAUTIONS:

Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in potentially fatal electric shock and/or property damage.

It is recommended that all wiring be performed by a qualified electrician. This fixture must be wired in accordance with all national and local electrical codes.


Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.

Make sure that the power source conforms to the requirements of the fixture (see labels on fixture housing).

To reduce the risk of electrical shock, and to assure proper operation, this fixture must be adequately grounded. To accomplish proper grounding, there must be a separate ground wire (green) or bare metal contact (metal conduit) between this fixture and the ground connection of your main power supply panel.

INSTALLATION INSTRUCTIONS

1. Turn off power at the circuit breaker and the light switch. Ensure the power is off before continuing.
2. Secure the mounting bracket (3) to the junction box by mounting screws (2).
3. Make wire connections. connect the black supply wire to black wire ,white supply wire to white wire and the fixture ground wire to supply ground wire by using wire nuts. Wrap all wire connections with electrical tape for secure connection. Arrange the wires and put them into the junction box.
4. Choosing the right colour temperature (3000 k / 4000 k / 5000 k).
5. Fix the fixture body (1) to the mounting bracket (3) by using the fixture body screw (4). Keep the fixture body (1) flat against the ceiling.
6. Complete the installation and turn on the switch.

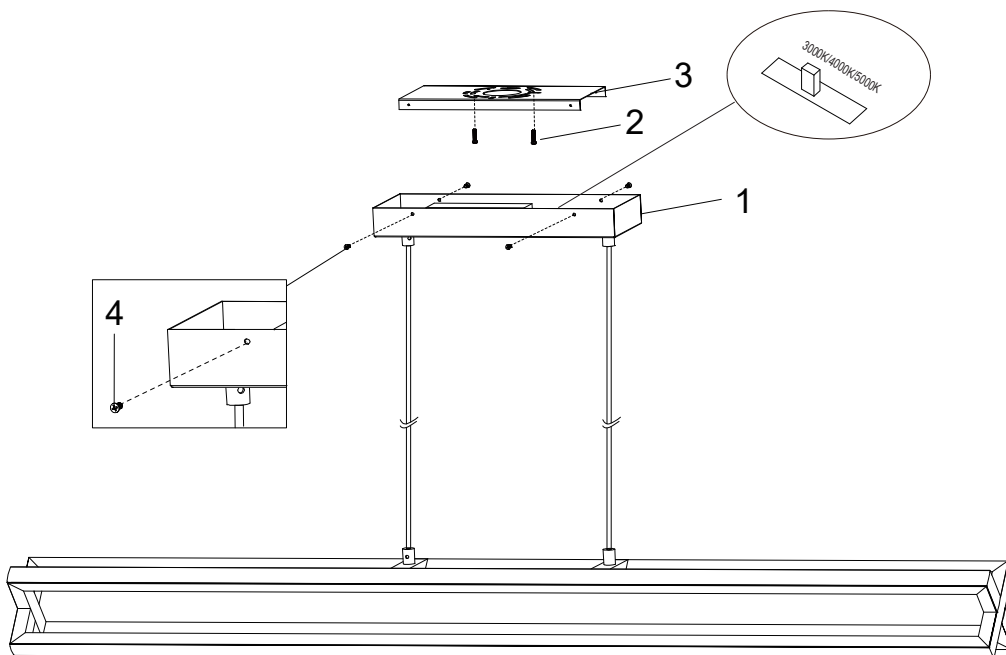

1. Fixture Body
2. Mounting Screw
3. Mounting Bracket
4. Fixture Body Screw