




Features

- Edge-lit technology, no glare or dark spots, instant-on
- This 5/8" thick luminaire is easy to install on standard J-boxes with a quick snap
- Construction: die-formed high impact plastic with white translucent acrylic lens.
- Dimming: 0-10V down to 10%
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours
- Field selectable 2700K, 3000K, 3500K, 4000K, 5000K



DIMENSIONS

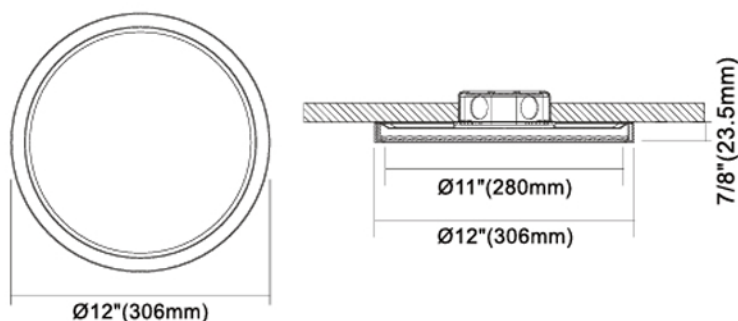

INCLUDED IN BOX

- Round Slim Surface
- Mounting Bracket to J-Box
- Two Mounting Screws
- Three Wire Nuts



Universal J-Box Kit

Accessories(sold sperately)

Decorative Ring Used for 12" Round Slim Surface



Round | Deep Bronze



Round | Brushed Nickel



Round | Black

SPECIFICATIONS

Model	VLSP12DCCTW-UNV
Watts	22W
CRI	90Ra (80Ra Optional)
Color Temperature(K)	5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
Light Ouput(lm)	1800 lm Delivered Lumens
Default Driver Input	AC120-277V, 60Hz
Dimming	0-10V Dimming
Power Factor	>0.9
Approved Location	Wet Location
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°

Accessories included:
Attach mounting bracket to J-box
Click downlight into mounting bracket



Mounting
Bracket



J-Box
Screws



Wire
Nuts

Installation

